

BIS(TERT-BUTYLAMINO)SILANE

BTBASi

 **Product description**

Name: BIS(TERT-BUTYLAMINO)SILANE

CAS-Number: 186598-40-3

Application: ALD and CVD precursor

Element: Si

BIS(TERT-BUTYLAMINO)SILANE

BTBASi

Physical Properties

Vapor pressure equat.:	$\log(p(\text{Torr})) = 8.66 - 2500/T(\text{K})$
Density:	0.816 g/cm ³
Molweight:	174.36 g/mol
Melting point:	n.a.
Boiling point:	167 °C / 332.6 °F (5.3 mbar)
Sublimation point:	

Chemical Properties

Stability:	Stable in sealed corrosion resistant container. Stored under a dry inert atmosphere.
State of matter:	Solid

Safety & Transport

Toxicity:	n.a.
Thermal decomposition:	
ADR/RID-class:	3(8)
UN-no:	2924
IMDG-class:	3(8)
UN-no:	2924
ICAO/IATA-class:	3(8)
UN-no:	2924 – AIR FREIGHT ALLOWED

For further details please refer to Safety Data Sheet (SDS)


Packaging & Standard Filling Volumes

BTBASi.100.DOCK/10.150	100g / 150ccm cyl.
BTBASi.250.DOCK/10.400	250g / 400ccm cyl.
BTBASi.425.DOCK/10.600	425g / 600ccm cyl.
BTBASi.700.DOCK/10.1000	700g / 1000ccm cyl

Quality Standards

EG –Electronic Grade

Vapor Pressure Curve

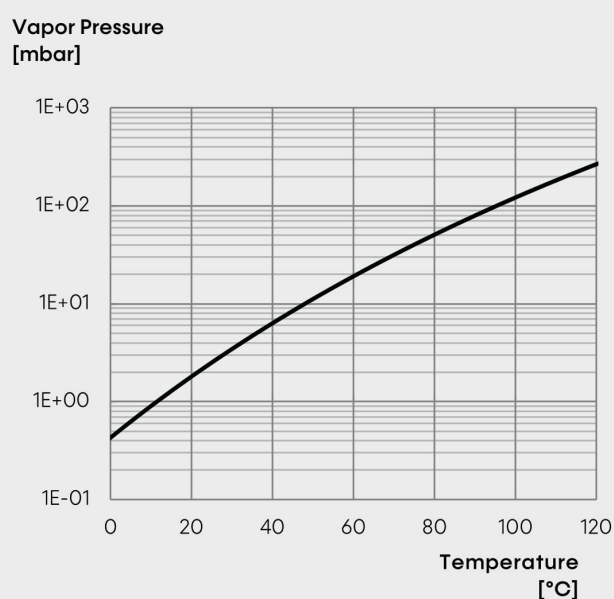

Application

ALD and CVD precursor



Dockweiler Chemicals GmbH
Emil-von-Behring-Strasse 76
Goerzhaeuser Hof M217
35041 Marburg, Germany

T +49 (0)6421 39-6380
F +49 (0)6421 39-6381
info@dockchemicals.com

dockchemicals.com